



Key features:

This kind of capacitor polypropylene film (thickened by zine and aluminum) ,coiling by automatic winding machine,package plastic shell,filling epoxy.Capacitors have good sealing,good insulation,self-healing,low loss,low inherent temperature rise,stable performance, longer life.

Applicable to the frequency of 50/60Hz ac single phase power supply motor starting and running purposes.Wildly used for refrigerator 、 freezer、 air conditioning、 washing machine、 cleaning machine、 air compressor motor starting and running



Dimensions: (mm)

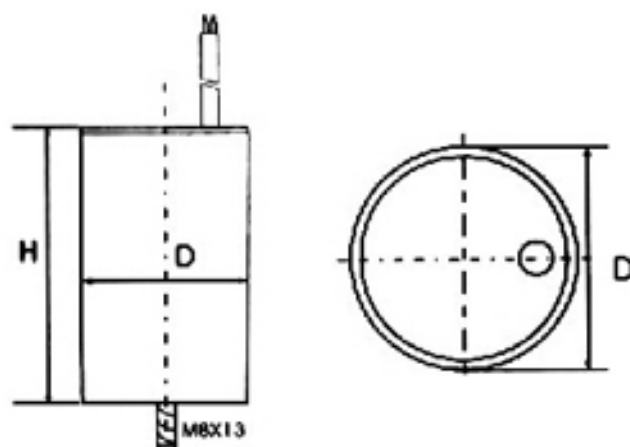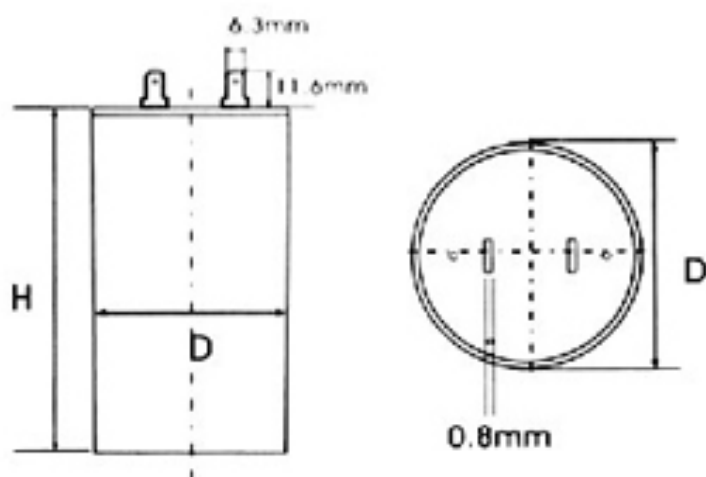

COMMOM DIMENSION:mm

uF	250/300VAC		370/400VAC		450VAC	
	D±1	H±2	D±1	H±2	D±1	H±2
2	25	45	25	45	25	45
2.5	25	45	25	45	25	45
3	25	45	25	45	25	45
3.5	25	45	25	45	26	50
4	25	45	26	50	26	50
4.5	25	45	26	50	26	50
5	25	45	26	50	30	51
6	26	50	26	60	30	51
7	26	60	30	51	30	60
8	30	51	30	60	30	68
9	30	51	30	68	35	60
10	30	51	30	68	35	60
12	30	60	35	60	35	69
12.5	30	68	35	60	35	69
14	30	68	35	69	38	71
15	30	68	35	69	38	71
16	35	60	35	69	38	71
18	35	60	38	71	40	70
20	35	60	40	70	40	70
22	35	69	40	70	42	70
25	38	71	42	70	42	80
26	38	71	42	70	42	80
28	38	71	42	80	42	90
30	38	71	42	80	42	90
31.5	45	80	42	90	42	90
35	42	70	42	90	45	92
40	42	80	42	90	45	92
45	45	80	45	92	50	92
50	45	80	45	92	50	92
55	45	80	50	92	50	100
60	45	92	50	92	50	100
65	45	92	50	100	50	117
70	50	92	50	100	50	117
75	50	92	50	102	60	100
80	50	92	50	102	60	100
85	50	92	55	115	60	100
90	50	100	60	100	60	100
100	50	117	60	100	60	120
110	50	117	60	120	67	130
115	50	117	60	120	67	130
120	60	100	60	120	67	130

Special request as client's drawing and sample.

Technical specifications:

PERFORMANCE STANDARD	GB/T 3667.1-2005(IEC60252-1)
CLIMATE TYPES	40/70/21;40/85/21
SAFTY CERTIFICATE	CB、CE、VDE、UL、TUV
RATED VOLTAGE	250/300VAC、370/400VAC、450VAC
CAPACITANCE RANGE	2.0uF~120uF
CAPACITANCE TOLERANCE	±5%
LOSS TANGENT	$\text{tg}\delta \leq 0.002(20^{\circ}\text{C}, 100\text{Hz})$
MAX. WORKING VOLTAGE	ON 1.1UN LONG TIME RUNNING
MAX. WORKING CURRENT	ON 1.3IN LONG TIME RUNNING
LEADING OUT MODE	WIRES,PINS,CABLE